



MAKE THE MOST OF  
YOUR TALENT

# SLUDGE REMOVAL PUMP

## VIRAFAL®

### 1 HIGH POWER

Maximum flow rate 80L/min and maximum pressure 7 bar.  
Effective and robust compressor: self-lubricated, power 1.5 kW, 8 bar and evacuates 200L/min.

### 2 VERSATILE

Mechanical cleaning to separate and expel the sludge.  
Chemical cleaning for sludge removal, sanitization, protection and disinfection.

### 3 PRACTICAL


Easy installation with its roller trolley and fastening suction cups.  
Connectors and pipes supplied for immediate use.  
Injector and reducer for use with chemicals.  
Extensible handle to carry the VIRAFAL without bending down. Included in references 295053 and 295059.

- 295050 VIRAFAL
- 295053 VIRAFAL + INJECTOR + REDUCER + HANDLE
- 295054 VIRAFAL CONNECT
- 295059 VIRAFAL CONNECT + INJECTOR + REDUCER + HANDLE



## CONNECTED VERSION

To print intervention reports in compliance with European Directive EN806.

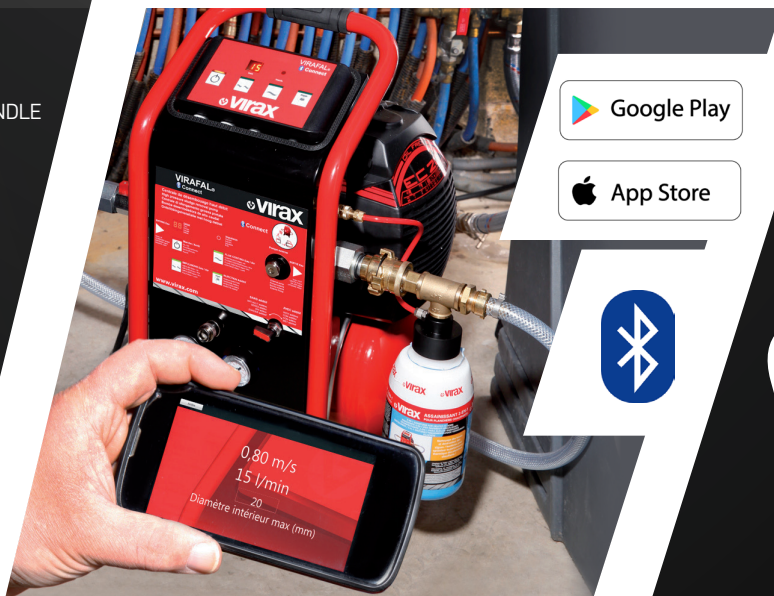

Google Play

App Store



#VIRAXFRENCHMANUFACTURER



Graphic design: © CHRISTOPHE TOUSSAINT

